


K2 POWER E 25 KX 10" Subwoofer




- K2 Power sandwich cone
- Aluminum basket
- Dual voice coil (2x40hms)

FREQUENCY RESPONSE

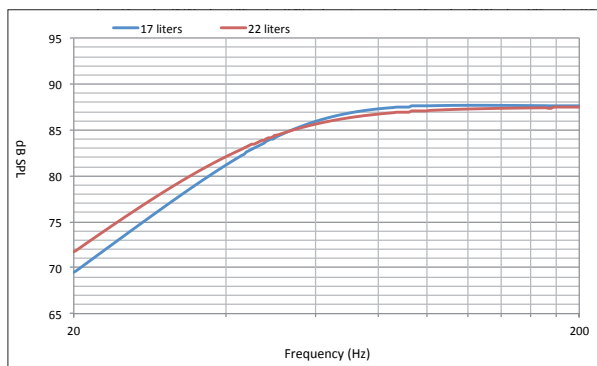

MECHANICAL DRAWING

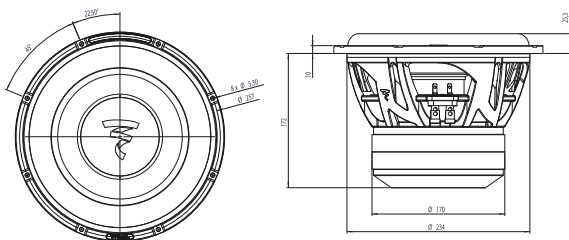

SPECIFICATIONS

Nominal power	600W RMS	
Maximum power	1200W	
Sensitivity (2.83V/1m)	87.5dB	
Cone	Kevlar sandwich	
Surround	Butyl	
Nom. impedance	4+4 Ω	
DC resistance	3.2+3.2 Ω	
VC diameter	65mm	2 ^{9/16"}
Former	Glass fiber	
Layers	4	
Wire	CCAW	
Net weight	10.6kg	23.4lbs
Driver Displacement	3l	0.1 cu.ft.

PARAMETERS

Rdc	3.2+3.2 Ω	
Fs	38Hz	
Mms	163g	
Cms	0.12mm/N	
Vas	20l	
Qts	0.52	
Qes	0.58	
Qms	5	
Bxl	21.5 N/A	
Sd	327cm ²	
SPL	84.5dB	
Xmax	22.5mm	

SUGGESTED APPLICATION

Sealed enclosure

Volume	F-3 (Hz)
17L 0.65 cu.ft.	51Hz
22L 0.78 cu.ft.	48Hz

Ported enclosure

Volume	F-3 (Hz)	Ø event Ø port	LG event Port lenght
22L 0.78 cu.ft.	33Hz	8cm 3 ^{5/32"}	35cm 13 ^{25/32"}
30L 1 cu.ft.	27Hz	8cm 3 ^{5/32"}	43cm 16 ^{15/16"}



Elite
"HAUTE COUTURE" SOUND



FOCAL
THE SPIRIT OF SOUND